


INSTALLATION INSTRUCTIONS


1

ENSURE A FLAT MOUNTING SURFACE WITH AT LEAST THE SAME DIMENSIONS AS THE DOUBLE BURNER, PREFERABLY USE THE MOUNTING PLATES PLDUB03-LED OR PLDUB04-LED.

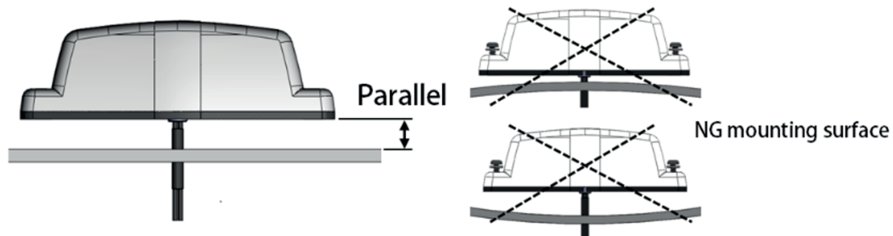

2


PLEASE ENSURE THAT THE INSTALLATION IS DONE IN THE RIGHT SEQUENCE

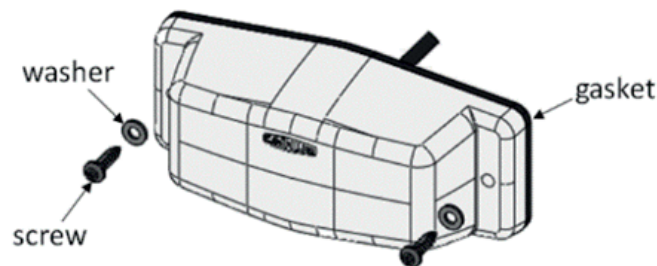

3

PREPARATION FOR INSTALLATION:

- CUT OUT OR DRILL CABLE OUTLET HOLE SIZE MIN. Ø 10MM
- SCREW MOUNTING HOLE MIN. Ø 3.2MM

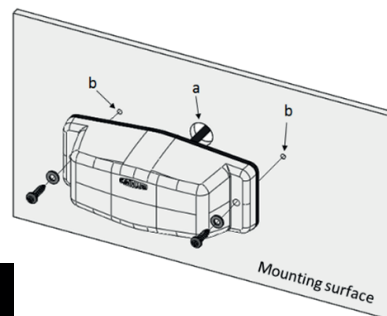


IF THE MOUNTING PLATE (PLDUB 03-LED OR PLDUB04-LED) IS USED, THESE HOLES ARE ALREADY PROVIDED AND THIS STEP CAN BE SKIPPED.

4

LOCKING SCREWS :

- LOCKING TORQUE: **HAND TIGHT**
- ALTERNATELY TIGHTEN THE TWO SCREWS EVENLY.

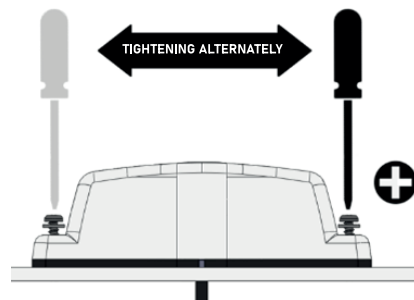

PRECAUTIONS OF CHEMICALS

- FUEL AND CORROSIVE CHEMICALS MUST NOT BE APPLIED TO THE SURFACE OF THIS LIGHT.
- AFTER USING THE VEHICLE CLEANING SUPPLIES, IT MUST BE RINSED THOROUGHLY WITH CLEAN WATER IMMEDIATELY TO AVOID THE CLEANING AGENT OR ITS RESIDUE STAYING ON THE SURFACE OF THE LIGHT FOR TOO LONG.